


## R10 – SIGNAL DISTRIBUTION 0-10V

KK R10 15.01 EN

### DIMENSIONS

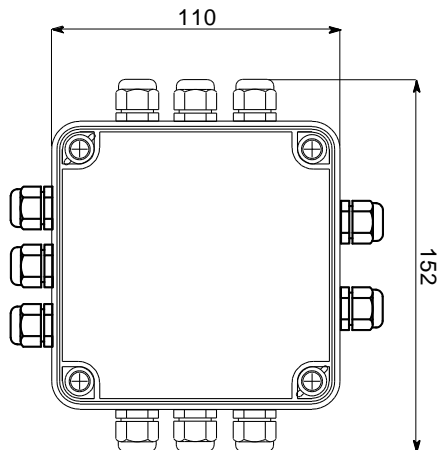

### GENERAL CHARACTERISTIC

By using R10 signal distributor it is possible to use a single VNT20 or VNTLCD control panel to operate up to 10 LEO M-type devices.

### TECHNICAL DATA

Operation temperature range	0 - 40 [°C]
Protection class	IP54
Mounting type	surface
Max. cable profile	2 mm <sup>2</sup>

### INSTALLATION AND MAINTENANCE

- signal distributor is designed to be installed indoors,
- control signal wires should be protected by sleeves,
- control signal must be connected using at least LIYCY 2x0,5mm<sup>2</sup> shielded cable